


CTV2KM-64 Vision System




**Includes
automatic and
manual part
recognition**

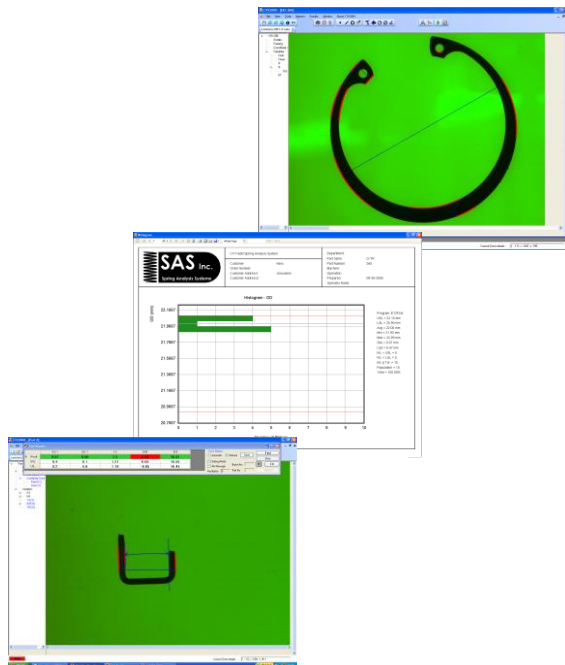

Specifications

Camera Type	5Mpixel Industrial CMOS
Lens	1-7808 telecentric
Lens connection	C type
Minimum part size	0.75 x 0.75mm 0.03" x 0.03"
Maximum part size	64 x 48mm 2.52"x1.89"
Includes Z servo axis	No – Manual Z Motion- Standard
Includes XY servo axes	No
Vision space resolution	0.025mm 0.00098"
Vision space accuracy	±0.005mm (±0.000197") only with sub-pixel interpolation
Includes SPC	Yes
User Interface	19" Wide LCD display
PC minimum configuration	Intel Core 2 Duo, 2.66GHz, 4Gbyte RAM 500 Gbyte HDD
Operating System	Windows XP Pro , Win 7 Pro
Optional Components	• Industrial enclosure for PC, required for shop-floor use. • Programmable IO Interface including IO hardware • Programmable front ring light.
Languages	English, German, Turkish and Russian (translation to other languages available).

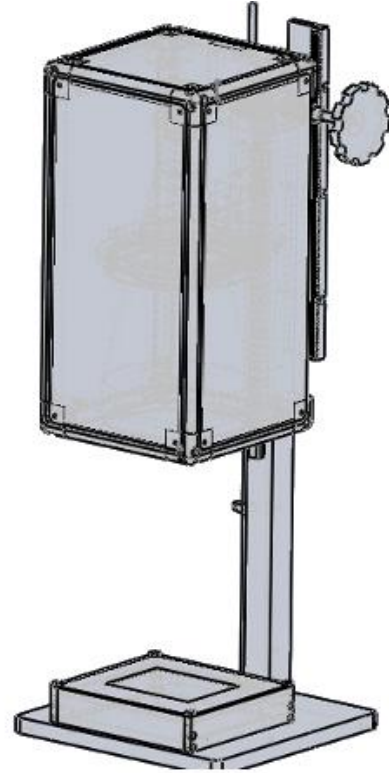

WWW.SASTESTERS.COM

Ph: +972-9-7603895

Fax: +972-9-7604849

E-Mail: Info@SASTESTERS.COM

Specifications may change without notice